HRB800EXIR

800+ TVL HR+ 2.0 Outdoor IR Bullet Camera

Key Features

- 800+ TVL Horizontal Resolution.
- True Day Night.
- 3.6mm Fixed Lens, 0.1 Lux/F1.2.
- 40m EXIR IR Distance.
- Wide Operating Temparature Range: -40 to 60 ºC (-40 to 140 ºF).
- Smart IR
- Digital WDR

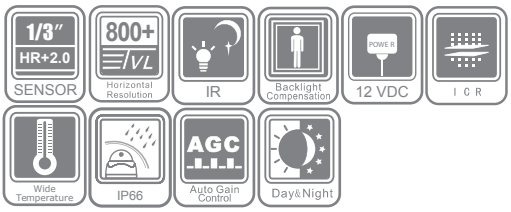

Specifications

	HRB800EXIR
Cámera	
Image Sensor	1/3" HR+2.0
Signal System	PAL/NTSC
Effective Pixels	976 (H) x 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter speed	**PAL:** 1/50 s to 1/100,000 s **NTSC:** 1/60 s to 1/100,000 s
Lens	3.6 mm
	Angle of view: 68.4°
Lens Mount	Board
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	800+ TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature / Humidity	40 to 60 °C (-40 to 140 °F) / Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 4W (Max. 7.5W with IR cut filter on)
Ingress Protection	IP66
IR Range	40 meters EXIR IR distance
Dimensions	105 x 86.9 x 267.2 mm (4.13 x 3.42 x 10.52")
Weight	1350 g (2.97 lbs)

* All specifications are subjet to change without notice.
* All brand names and registered trademarks are the property of their respective owners.